

▶ ABOUT US	1
▶ PNEUMATIC STAPLERS	2
▶ PNEUMATIC BRAD NAILERS	7
▶ PNEUMATIC COIL NAILERS 15°	9
▶ CARTON STAPLERS	12
▶ PNEUMATIC PINNERS	13
▶ CORRUGATED FASTENER	13
▶ PNEUMATIC C RINGERS	14
▶ MANUAL C RINGER	14
▶ PNEUMATIC PLIERS	15
▶ FOR PLASTIC FASTENERS	16
▶ FLOORING NAILERS	17
▶ CONCRETE NAILER	18
▶ STAPLE REMOVER	18
▶ HAND TACKERS	19
▶ HAMMER TACKERS	20
▶ ELECTRIC STAPLERS	21
▶ ELECTRIC BRAD NAILERS	21
▶ NEW PRODUCTS	22
▶ COMPRESSORS	28
▶ ACCESSORIES	29
▶ APPLICATIONS - FURNITURE	34
▶ APPLICATIONS - PACKAGING	35
▶ APPLICATIONS - AUTO	36
▶ APPLICATIONS - SPECIAL	36
▶ CONSUMABLES	40
▶ MAINTENANCE & REPAIRS	41

Kaymo, established in **1959**, is a **professionally managed, ISO 9001 : 2008** company.

OUR PRINCIPLES

For us, how we do things is equally important as what we achieve.

KAYMO WORKS ON 4 PRINCIPLES :

- ▀ Integrity
- ▀ Win-Win
- ▀ Customer Delight
- ▀ Excellence



OUR STRENGTHS

- Largest range of tools & fasteners
- National service network
- Widest dealership network in India
- Managing key account relationships
- Dedicated customer care team
- Modern manufacturing facilities
- Specialized R & D department to develop customized solutions
- Sales offices across India



WE EXIST TO GIVE....

- To the nation, a responsible company, generating employment & wealth with integrity
- To industry, a reliable partner, offering the highest standard of quality & service
- To our team, a better quality life, an opportunity to maximize our potential & develop our leadership
- To society, a caring citizen, making a difference in our circle of influence

DOING OUR BIT....

Kaymo is fortunate to be able to contribute in a small way to some wonderful social initiatives




MODEL : ECO-PS8016

PNEUMATIC STAPLER
Features :

- Light weight tool
- Curved trigger for better operational grip
- Staple viewing window
- Ergonomic rubber grip

80 series

Outer Crown	12.90
Inner Crown	11.40
Wire Dimensions	0.65 x 0.95
Leg Lengths	3 - 16



ECO
MODEL : PRO-PS8016

PNEUMATIC STAPLER
Features :

- Ergonomic rubber grip
- Safety trigger
- Protective metal wings
- 360° exhaust
- PRESSURE: 60 - 90 psi

80 series

Outer Crown	12.90
Inner Crown	11.40
Wire Dimensions	0.65 x 0.95
Leg Lengths	3 - 16



PRO
MODEL : ECO-PS8016LN
new

PNEUMATIC STAPLER LONG NOSE
Features :

- 145 staple loading magazine
- Metal internal parts
- 2" long nose for better reach
- Safety trigger

80 series

Outer Crown	12.90
Inner Crown	11.40
Wire Dimensions	0.65 x 0.95
Leg Lengths	4 - 16



ECO
MODEL : PRO-PS8016LV2

PNEUMATIC STAPLER LONG NOSE
Features :

- Safety trigger lock
- Rear exhaust
- Ergonomic rubber grip
- Full metal magazine and cap

80 series

Outer Crown	12.90
Inner Crown	11.40
Wire Dimensions	0.65 x 0.95
Leg Lengths	3 - 16



PRO
MODEL : PRO-PS8016V2

PNEUMATIC STAPLER
Features :

- Rear exhaust
- 2 way staple loading magazine catch
- Internal parts made of metal
- Curved trigger for easy & quick stapling
- Ergonomic rubber grip

80 series

Outer Crown	12.90
Inner Crown	11.40
Wire Dimensions	0.65 x 0.95
Leg Lengths	3 - 16


PRO


MODEL : XPRO-PS8016

PNEUMATIC STAPLER
Features :

- Rear exhaust with silencer
- 145 staple loading magazine
- Metal internal parts
- Durable twin piston rings which are long lasting
- Ergonomic rubber grip
- Safety trigger

80 series

Outer Crown	12.90
Inner Crown	11.40
Wire Dimensions	0.65 x 0.95
Leg Lengths	4 - 16



MODEL : XPRO-PS8016LN

PNEUMATIC STAPLER LONG NOSE
Features :

- Rear exhaust with silencer
- 145 staple loading magazine
- Metal internal parts
- Durable twin piston rings which are long lasting
- Ergonomic rubber grip
- 2" long nose for better reach
- Safety trigger

80 series

Outer Crown	12.90
Inner Crown	11.40
Wire Dimensions	0.65 x 0.95
Leg Lengths	4 - 16



MODEL : XPRO-PS8016FA

PNEUMATIC STAPLER FOLDING ATTACHMENT
Features :

- Ergonomic rubber grip
- Rear exhaust
- Elastic blade
- Folding attachment alignment screw

80 series

Outer Crown	12.90
Inner Crown	11.40
Wire Dimensions	0.65 x 0.95
Leg Lengths	4 - 16



MODEL : XPRO-PS8016BLM

PNEUMATIC STAPLER LONG MAGAZINE
Features :

- Rear exhaust with silencer
- Trigger safety lock
- Can accommodate 140 staples at a time
- Closed magazine assembly for dust free working of tool

80 series

Outer Crown	12.90
Inner Crown	11.40
Wire Dimensions	0.65 x 0.95
Leg Lengths	4 - 16



MODEL : PRO-PS2315V2
new

PNEUMATIC STAPLER
Features :

- Ergonomic rubber grip
- Safety trigger
- Protective metal wings
- 360° exhaust

23 series

Outer Crown	12.80
Inner Crown	11.80
Wire Dimensions	0.50 x 0.75
Leg Lengths	6 - 15




MODEL : ECO-PS1013JV2
new

PNEUMATIC STAPLER
Features :

- Staple viewing window
- Large magazine latch for easy unloading
- Easy reach nose plate

10J series

Outer Crown	11.20
Inner Crown	10.00
Wire Dimensions	0.60 x 1.20
Leg Lengths	6 - 13



ECO
MODEL : PRO-PS1013J

PNEUMATIC STAPLER
Features :

- Rear exhaust with silencer
- Ergonomic rubber grip
- 2 way optional loading / unloading catch
- Curved trigger for better stapling cylinder

10J series

Outer Crown	11.20
Inner Crown	10.00
Wire Dimensions	0.60 x 1.20
Leg Lengths	6 - 13



PRO
MODEL : ECO-PS1013F

PNEUMATIC STAPLER
Features :

- Curved trigger for better operational grip
- Ergonomic rubber grip
- Light weight

10F series

Outer Crown	11.00
Inner Crown	10.00
Wire Dimensions	0.50 x 0.75
Leg Lengths	3 - 13



ECO
MODEL : ECO-PS7116

PNEUMATIC STAPLER
Features :

- Ergonomic rubber grip
- Metal internal parts
- Economically priced spares

71 series

Outer Crown	9.00
Inner Crown	7.70
Wire Dimensions	0.60 x 0.75
Leg Lengths	6 - 16


ECO

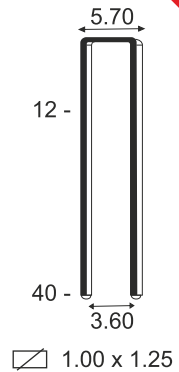
MODEL : PRO-PS9040

PNEUMATIC STAPLER
Features :

- Metal cylinder & head valve piston
- 360° exhaust
- Screw mounted depth adjustment
- Safety device design ensures better grip

90 series

Outer Crown	5.70
Inner Crown	3.60
Wire Dimensions	1.00 x 1.25
Leg Lengths	12 - 40


PRO
MODEL : ECO-PS9040COMBI

PNEUMATIC STAPLER COMBI
Features :


- 360° exhaust
- Scratch free rubber tip on nose
- Spring mounted safety device
- Depth adjustment

90 series

Outer Crown	5.70
Inner Crown	3.60
Wire Dimensions	1.00 x 1.25
Leg Lengths	12 - 40

18G series

Gauge	18
Head	2.00
Wire Dimensions	1.00 x 1.25
Leg Lengths	15 - 50



ECO
MODEL : PRO-PS9240
new

PNEUMATIC STAPLER
Features :

- Metal cylinder and head valve piston
- 360° exhaust
- Screw mounted depth adjustment for different hardness of wood
- Design of the safety device ensures that the tool does not slip
- Optional trigger
- PRESSURE: 70-100 PSI

92 series

Outer Crown	8.60
Inner Crown	6.50
Wire Dimensions	1.00 x 1.25
Leg Lengths	19 - 40



PRO
MODEL : PRO-PS9716
new

PNEUMATIC STAPLER
Features :

- Narrow staples used
- No mar nose plate
- 45° plastic nose plate cover for angular stapling
- Ergonomic rubber grip
- PRESSURE: 60-90 PSI

97 series

Outer Crown	4.5
Inner Crown	3.0
Wire Dimensions	0.65 x 0.95
Leg Lengths	6 - 16


PRO

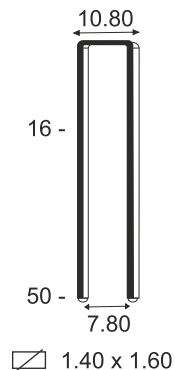
MODEL : ECO-PS10050E2
new

PNEUMATIC STAPLER
Features :

- Rubber ergonomic grip
- Light weight nylon magazine
- Height impact stapling tool
- Easy operation staple pusher

100 series

Outer Crown	10.80
Inner Crown	7.80
Wire Dimensions	1.40 x 1.60
Leg Lengths	16 - 50

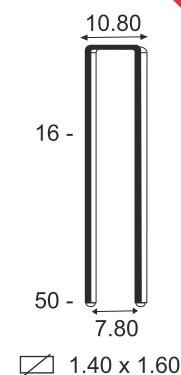

ECO
MODEL : PRO-PS10050V2

PNEUMATIC STAPLER
Features :

- 360° exhaust deflector
- High speed & powerful tool operation
- Light weight magnesium housing
- Optional trigger with single shot & bump fire
- Easy front un-jamming catch

100 series

Outer Crown	10.80
Inner Crown	7.80
Wire Dimensions	1.40 x 1.60
Leg Lengths	16 - 50



PRO
MODEL : PRO-PS16WC38V2

PNEUMATIC STAPLER
Features :

- Reinforced staple guard
- Optional trigger for single shot & bump fire
- Screw mounted depth adjustment
- Easy front un-jamming catch

16WC series

Outer Crown	25.00
Inner Crown	22.00
Wire Dimensions	1.40 x 1.60
Leg Lengths	22 - 38



PRO
MODEL : PRO-PSHS16

PNEUMATIC STAPLER
Features :

- Ergonomic rubber grip
- Reversible bumper for longer life
- Trigger lock
- Metal cylinder
- Rear exhaust

HS series

Outer Crown	8.50
Inner Crown	7.30
Wire Dimensions	0.60 x 1.15
Leg Lengths	8 - 16


PRO


MODEL : ECO-PB18G32

PNEUMATIC BRAD NAILER
Features :

- Rubber comfort grip
- 360° exhaust

18G series

Gauge	18
Head	2.00
Wire Dimensions	1.00 x 1.25
Leg Lengths	10 - 32



MODEL : ECO-PB18G50

PNEUMATIC BRAD NAILER
Features :

- Rubber comfort grip
- 360° exhaust to ensure air is deflected away from the operator

18G series

Gauge	18
Head	2.00
Wire Dimensions	1.00 x 1.25
Leg Lengths	15 - 50



MODEL : ECO-PB18G50NN
new

**PNEUMATIC BRAD NAILER
NARROW NOSE**
Features :

- Brad un-jamming catch and brad depth adjustment
- Narrow nose with rubber tip for hard to reach places
- Rubber grip
- 360° exhaust
- PRESSURE : 60-100 PSI

18G series

Gauge	18
Head	2.00
Wire Dimensions	1.00 x 1.25
Leg Lengths	15 - 50



MODEL : PRO-PB18G32

PNEUMATIC BRAD NAILER
Features :

- Screwable depth adjustment
- 360° exhaust
- Easy unjamming catch
- Single & bump fire trigger
- Ergonomic rubber grip

18G series

Gauge	18
Head	2.00
Wire Dimensions	1.00 x 1.25
Leg Lengths	10 - 32




MODEL : PRO-PB18G50V3
new

PNEUMATIC BRAD NAILER
Features :

- Easy un-jamming catch
- Ergonomic rubber grip
- Switchable trigger
- 360° air exhaust
- Metal magazine and slider
- Depth control +/- lever

**18G
series**

Gauge	18
Head	2.00
Wire Dimensions	1.00 x 1.25
Leg Lengths	15 - 50



MODEL : ECO-PB16G50
new

PNEUMATIC BRAD NAILER
Features :

- Full metal mag, rubber grip
- 360° exhaust
- Safety device
- Brad nail un-jamming plate
- PRESSURE 60-100 PSI

**16G
series**

Gauge	16
Head	2.80
Wire Dimensions	1.40 x 1.60
Leg Lengths	25 - 50



MODEL : ECO-PB16G50UD
new

**PNEUMATIC BRAD NAILER
UN-JAMMING DEPTH ADJUSTMENT**
Features :

- Brad un-jamming catch and brad depth adjustment
- Rubber grip
- No mark plastic tip
- 360° exhaust
- PRESSURE 60-100 PSI

**16G
series**

Gauge	16
Head	2.80
Wire Dimensions	1.40 x 1.60
Leg Lengths	25 - 50



MODEL : ECO-PB16G64

PNEUMATIC BRAD NAILER
Features :

- Auto stop for low brad content
- Screwable depth adjustment
- Nylon magazine with rear loading
- Easy un-jamming catch
- Scratch free rubber tip
- Single & bump fire trigger
- 360° adjustable exhaust

**16G
series**

Gauge	16
Head	2.80
Wire Dimensions	1.40 x 1.60
Leg Lengths	25 - 64

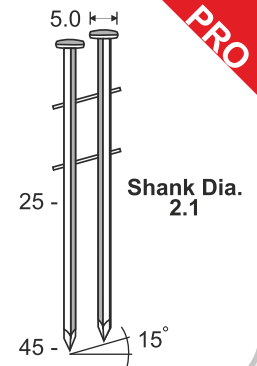


MODEL : PRO-PN2150

PNEUMATIC COIL NAILER
Features :

- Ergonomic rubber grip
- 360° exhaust
- Scratch free rubber cap
- Nail depth adjustment
- Transparent magazine to see nail content
- Single / bump fire optional trigger

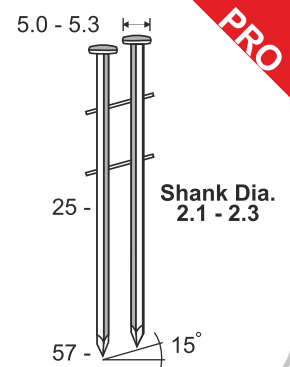
Shank Dia	Head	Nail Lengths
2.1	5.0	25 - 45


MODEL : PRO-PN2357

PNEUMATIC COIL NAILER
Features :

- Ergonomic rubber grip
- 360° exhaust
- Set of metal guards to prevent tool body damage
- Tough nylon magazine

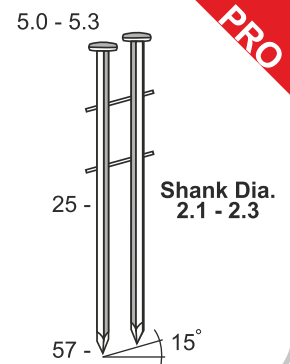
Shank Dia	Head	Nail Lengths
2.1	5.0	25 - 45
2.3	5.3	45 - 57


MODEL : PRO-PN2357V2
new

PNEUMATIC COIL NAILER
Features :

- 360° exhaust, rubber grip, magazine locking cover
- Metal body protector
- Tough nylon magazine
- Transparent muzzle protector
- PRESSURE : 70-100 PSI

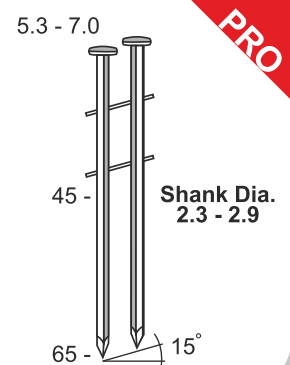
Shank Dia	Head	Nail Lengths
2.1	5.0	25 - 45
2.3	5.3	45 - 57


MODEL : PRO-PN2965
new

PNEUMATIC COIL NAILER
Features :

- Rubber grip
- High impact tool
- Tough nylon magazine
- Set of metal wings to prevent body damage, transparent muzzle protector
- PRESSURE: 70-110 PSI

Shank Dia	Head	Nail Lengths
2.3	5.3	45 - 65
2.5	6.2	50 - 65
2.8 / 2.9	7.0	65

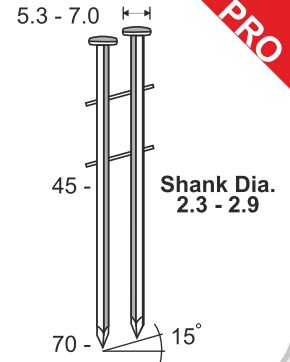


MODEL : PRO-PN2970

PNEUMATIC COIL NAILER
Features :

- Ergonomic rubber grip
- Set of metal guards to prevent tool body damage
- Tough nylon magazine

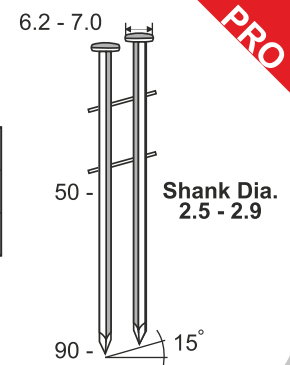
Shank Dia	Head	Nail Lengths
2.3	5.3	45 - 65
2.5	6.2	50 - 70
2.8 / 2.9	7.0	70


MODEL : PRO-PN3390

PNEUMATIC COIL NAILER
Features :

- Ergonomic rubber grip
- Set of metal guards to prevent tool body damage
- Tough nylon magazine
- 360° exhaust

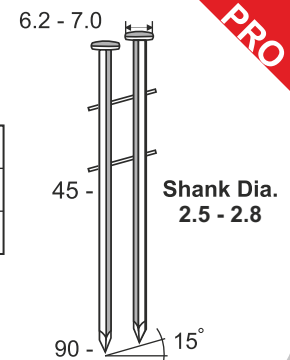
Shank Dia	Head	Nail Lengths
2.5	6.2	50 - 70
2.8 / 2.9	7.0	70 - 90


MODEL : PRO-PN3383
new

PNEUMATIC COIL NAILER
Features :

- Ergonomic rubber grip
- Set of metal guards to prevent tool body damage
- Tough nylon magazine
- 360° exhaust


Shank Dia	Head	Nail Lengths
2.5	6.2	45 - 83
2.8	7.0	70 - 90


MODEL : PRO-PN38100

PNEUMATIC COIL NAILER
Features :

- Ergonomic rubber grip
- Set of metal guards to prevent tool body damage
- Tough nylon magazine
- Silencer for noise reduction at exhaust
- Extra handle for proper tool gripping

Shank Dia	Head	Nail Lengths
2.5	6.2	50 - 70
2.8 / 2.9	7.0	70 - 90
3.0 / 3.4	7.0	100




MODEL : PRO-PN38130

PNEUMATIC COIL NAILER
Features :

- Ergonomic rubber grip
- Set of metal guards to prevent tool body damage
- Tough nylon magazine
- Silencer for noise reduction at exhaust
- Extra handle for proper tool gripping


Shank Dia	Head	Nail Lengths
2.8 / 2.9	7.0	70 - 90
3.0 / 3.4	7.0	100
3.8	7.3	125


MODEL : ECO-PN2357

PNEUMATIC COIL NAILER
Features :

- Ergonomic rubber grip
- 360° exhaust
- Set of metal guards to prevent tool body damage
- Tough nylon magazine


Shank Dia	Head	Nail Lengths
2.1	5.0	25 - 45
2.3	5.3	45 - 57


MODEL : ECO-PN2970

PNEUMATIC COIL NAILER
Features :

- Ergonomic rubber grip
- Set of metal guards to prevent tool body damage
- Tough nylon adjustable magazine
- Optional spring balance capability


Shank Dia	Head	Nail Lengths
2.3	5.3	45 - 65
2.5	6.2	50 - 70
2.8 / 2.9	7.0	70


MODEL : ECO-PN3383

PNEUMATIC COIL NAILER
Features :

- Ergonomic rubber grip
- Set of metal guards to prevent tool body damage
- Tough nylon magazine
- 360° exhaust
- Long nose for easy reach
- Adjustable magazine holder

Shank Dia	Head	Nail Lengths
2.5	6.2	50 - 70
2.8 / 2.9	7.0	70 - 80




MODEL : PRO-AB3518COMBI

AIR BOXER COMBI
Features :

- Full metal body
- Spring steel pusher spring
- Clinching adjustment for different carton ply thickness
- Optional spring balance hook

35 series

Outer Crown	35.00
Inner Crown	33.00
Wire Dimensions	0.90 x 2.30
Leg Lengths	15 - 18



MODEL : PRO-AB3522COMBI

AIR BOXER COMBI
Features :

- Full metal body
- Spring steel pusher spring
- Clinching adjustment for different carton ply thickness
- Optional spring balance hook

35 series

Outer Crown	35.00
Inner Crown	33.00
Wire Dimensions	0.90 x 2.30
Leg Lengths	18 - 22



MODEL : PRO-HB3518COMBI

HAND BOXER COMBI
Features :

- Full metal body
- Spring steel pusher spring
- Manual tool, no pneumatic air required
- Clinching adjustment for different carton ply thickness

35 series

Outer Crown	35.00
Inner Crown	33.00
Wire Dimensions	0.90 x 2.30
Leg Lengths	15 - 18



MODEL : PRO-HB3522COMBI

HAND BOXER COMBI
Features :

- Full metal body
- Spring steel pusher spring
- Manual tool, no pneumatic air required
- Clinching adjustment for different carton ply thickness

35 series

Outer Crown	35.00
Inner Crown	33.00
Wire Dimensions	0.90 x 2.30
Leg Lengths	18 - 22



MODEL : PRO-BCM3522

BOTTOM CLOSER MANUAL
Features :

- Full metal body
- Spring steel pusher spring
- Manual tool, no pneumatic air required
- Clinching adjustment for different carton ply thickness

35 series

Outer Crown	35.00
Inner Crown	33.00
Wire Dimensions	0.90 x 2.30
Leg Lengths	15 - 22



Pneumatic Pinners

KAYMO®

MODEL : ECO-PP6422

new



PNEUMATIC PINNER

Features :

- Trigger dial lock
- 360° top air exhaust
- Pins loading mechanism
- Full metal magazine
- Ergonomic rubber grip

64
series

Gauge	23
Shank Dia	0.64
Leg Lengths	12 - 22

Ø 0.64

12 -

22 -

Gauge: 23
Headless pin

ECO

MODEL : PRO-PP6435



PNEUMATIC PINNER

Features :

- Rear exhaust
- Utility belt hook
- Screwable depth adjustment
- Scratch free rubber tip
- Transparent magazine slider
- Pins reload indicator
- Pins un-jamming plate
- Bump fire / single shot option

64 series

Gauge	23
Shank Dia	0.64
Leg Lengths	12 - 35

Gauge	23
Head	0.90
Shank Dia	0.64
Leg Lengths	12 - 35

Ø 0.64

12 -

35 -

Gauge: 23
Headless pin

Ø 0.64

0.90

12 -

35 -

Gauge: 23
Pin with small head

PRO

MODEL : XPRO-PP6435



PNEUMATIC PINNER

Features :

- Ergonomic rubber grip
- Rear exhaust with silencer
- Utility belt hook for hanging the tool on worker's belt
- Trigger safety lever
- Built in sprayer for cleaning the surface area

64 series

Gauge	23
Shank Dia	0.64
Leg Lengths	12 - 35

Gauge	23
Head	0.90
Shank Dia	0.64
Leg Lengths	12 - 35

Ø 0.64

12 -

35 -

Gauge: 23
Headless pin

Ø 0.64

0.90

12 -

35 -

Gauge: 23
Pin with small head

XPRO

Corrugated Fastener

MODEL : PRO-PC2515




PNEUMATIC CORRUGATED FASTENER

Features :

- Heavy duty tool
- 360° exhaust
- Spring mounted safety device
- Tool can be used for different densities & varieties of wood
- Closed magazine to ensure no dust enters the loading area

25
series

Outer Crown	25.00
Leg Lengths	9 - 15



25.00

9 -

15 -

PRO

Pneumatic C Ringers

KAYMO®

MODEL : PRO-HR24



PNEUMATIC C RINGER

Features :

- Rubber grip
- Noiseless tool
- Magazine loading capacity - 120 pcs in a slab
- Length of clinching anvils - 46.50 mm
- Inner diameter of C ring when closed - 7.80 mm

24
series

Outer Crown	23.70
Closed Dia	7.80

23.70



PRO

MODEL : PRO-HR24LN



PNEUMATIC C RINGER LONG NOSE

Features :

- Rubber grip
- Noiseless tool
- Magazine loading capacity - 120 pcs in a slab
- Length of clinching anvils - 61.50 mm
- Inner diameter of C ring when closed - 7.80 mm

24
series

Outer Crown	23.70
Closed Dia	7.80

23.70



PRO

MODEL : PRO-HR24TC



PNEUMATIC C RINGER TIGHT CLOSE

Features :

- Rubber grip
- Noiseless tool
- Magazine loading capacity - 120 pcs in a slab
- Length of clinching anvils - 46.50 mm
- Inner diameter of C ring when closed - 4.70 mm

24
series

Outer Crown	23.70
Closed Dia	4.70

23.70



PRO

Manual C Ringer

MODEL : KP-7

new



MANUAL C RINGER

Features :

- Manual tool no need of compressed air
- 100% portable
- Can be used for long periods
- Full metal magazine and tool housing
- Inner diameter of C ring when closed - 7.00 mm

20
series

Outer Crown	20.00
Closed Dia	7.00

20.00



PRO


MODEL : PRO-PL77925SJ

PNEUMATIC PLIER SHORT JAW
Features :

- Ergonomic rubber grip
- Long magazine takes upto 168 staples
- Safety trigger
- Metal internal parts
- Curved lever for quick opening of magazine during loading

779
series

Outer Crown	12.50
Inner Crown	10.90
Wire Dimensions	0.60 x 1.25
Leg Lengths	8 - 25



PRO
MODEL : PRO-PL77925BJ

PNEUMATIC PLIER BROAD JAW
Features :

- Ergonomic rubber grip
- Long magazine takes upto 168 staples
- Safety trigger
- Metal internal parts
- Curved lever for quick opening of magazine during loading

779
series

Outer Crown	12.50
Inner Crown	10.90
Wire Dimensions	0.60 x 1.25
Leg Lengths	8 - 25



PRO
MODEL : PRO-PL77925LJ

PNEUMATIC PLIER LONG JAW
Features :

- Ergonomic rubber grip
- Long magazine takes upto 168 staples
- Safety trigger
- Metal internal parts
- Curved lever for quick opening of magazine during loading

779
series

Outer Crown	12.50
Inner Crown	10.90
Wire Dimensions	0.60 x 1.25
Leg Lengths	8 - 25



PRO
MODEL : XPRO-PL77922BJ

PNEUMATIC PLIER BROAD JAW
Features :

- Heavy duty European tool
- Bottom jaw for better reach
- Staples can penetrate rubber, corrugated, edge boards & plastic re-enforced angle boards
- Rear exhaust with silencer

779
series

Outer Crown	12.50
Inner Crown	10.90
Wire Dimensions	0.60 x 1.25
Leg Lengths	8 - 22



XPRO
MODEL : XPRO-PL59025

PNEUMATIC PLIER
Features :

- Heavy duty European tool
- Staples can penetrate wood, edge boards & re-enforced angle boards
- Tool has height adjustment to suit different thickness of angle / edge boards
- Rear exhaust with silencer

590
series

Outer Crown	24.30
Inner Crown	22.20
Wire Dimensions	0.85 x 1.80
Leg Lengths	16 - 32


XPRO


MODEL : XPRO-PS81P15

PNEUMATIC COMPOSITE STAPLER
Features :

- Ergonomic rubber grip
- Rear exhaust with silencer
- Safety trigger lock
- Magazine opening catch

S05 series

Outer Crown	12.50
Leg Lengths	6.4 - 14



MODEL : XPRO-PPRIP25

PNEUMATIC COMPOSITE PINNER
Features :

- Rear exhaust with silencer
- Safety trigger
- Can accommodate 100 pins
- Accommodates 4 different sizes of pins (with indicator)
- Ergonomic rubber grip
- Unscrewable front plate for un-jamming
- Magazine opening catch

P18 series

Gauge	18
Shank Dia	1.1
Leg Lengths	11 - 25



MODEL : XPRO-PB1240P25

PNEUMATIC COMPOSITE BRAD NAILER
Features :

- Ergonomic rubber grip
- Optional trigger settings (bump fire / single fire)
- Transparent magazine slider
- Depth adjustment
- Spring mounted safety device
- Scratch-free rubber tip
- Unlatchable un-jamming catch
- 360° exhaust

18G series

Gauge	18
Head	2.00
Leg Lengths	18 - 25



MODEL : XPRO-HTS0515

HAND TACKER
Features :

- Screwable staple depth adjustment
- Handle lock catch
- Plastic moulded handle grip
- Full metal body
- Metal pusher with spring

S05 series

Outer Crown	12.50
Leg Lengths	6.4 - 14



MODEL : XPRO-FN1838 Q500
Primatech

FLOORING NAILER MANUAL
Features :

- Perfect tool for installation of solid hard wood tongue & groove joints
- Non marring mallet included
- Easy jam free operation & can accommodate upto 120 cleat nails
- Onsite portable tool
- Large base to increase stability & minimize damage to pre-finished floors
- Quick loading magazine with spring loaded pusher

18G series

Gauge	18
Leg Lengths	32 - 38



Gauge: 18

MODEL : XPRO-FN1650 H330
Primatech

FLOORING NAILER MANUAL
Features :

- Non marring mallet included
- Easy jam free operation & can accommodate upto 110 cleat nails
- Onsite portable tool
- Large base to increase stability & minimize damage to pre-finished floors
- Quick loading magazine with spring loaded pusher

16G series

Gauge	16
Leg Lengths	38 - 50



Gauge: 18

MODEL : XPRO-FN1838 Q550AL
new

FLOORING NAILER PNEUMATIC
Features :

- Non marring mallet included
- Installs 16mm to 22mm wooden flooring
- Built in adjuster to match flooring thickness to be nailed
- No re-coil
- Dual action & total precision adjustable base plate
- Safety mechanism embedded in base plate

18G series

Gauge	18
Leg Lengths	32 - 38



Gauge: 18

MODEL : XPRO-FN1650 250F
new

FLOORING NAILER PNEUMATIC
Features :

- Non marring mallet included
- Easy jam free operation & can accomodate upto 120 cleat nails
- Onsite portable tool
- Large base to increase stability & minimize damage to pre-finished floors
- Quick loading magazine with spring loaded pusher

16G series

Gauge	16
Leg Lengths	38 - 50



Gauge: 16

Concrete Nailer

MODEL : PRO-CC2264




CONCRETE NAILER

Features :

- Wood to concrete nailing
- Single fire & bump fire possible
- Safety device
- Easy side loading catch
- 360° exhaust

22
series

Gauge	14
Head	6.50
Shank Dia	2.50
Leg Lengths	18 - 64



Gauge: 14
Ø 2.50

PRO

Staple Remover

MODEL : SR



STAPLE REMOVER

Features :

- Easy staple access
- Easy grip

ECO

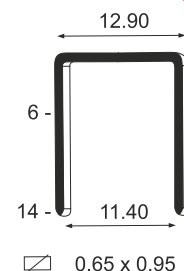
MODEL : PRO-HT8014

HAND TACKER
Features :

- All metal body
- Easy loading
- Horizontal spring plate design ensures that strokes are accurate
- Can be operated with one hand

80 series

Outer Crown	12.90
Inner Crown	11.40
Wire Dimensions	0.65 x 0.95
Leg Lengths	6 - 14

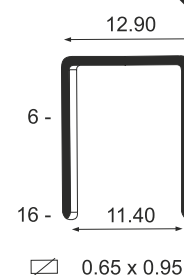

MODEL : XPRO-HT8016

HAND TACKER
Features :

- Depth adjustment for different hardness & varieties of wood
- Heavy duty tool
- Removable front plate for easy unjamming of staples
- Can be used where there is a power shortage

80 series

Outer Crown	12.90
Inner Crown	11.40
Wire Dimensions	0.65 x 0.95
Leg Lengths	6 - 16

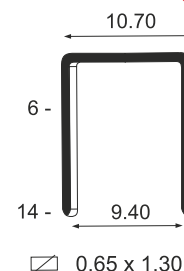

MODEL : PRO-HT5014

HAND TACKER
Features :

- Durable aluminium alloy die casting housing
- + / - power adjustment control system
- Rubber injection bi-material handle
- Integrated handle lock for compact storage
- Staple viewing window

50 series

Outer Crown	10.70
Inner Crown	9.40
Wire Dimensions	0.65 x 1.30
Leg Lengths	6 - 14

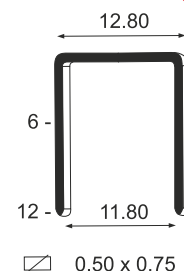

MODEL : PRO-HTTGA

HAND TACKER
Features :

- All steel body
- Hardened steel working parts
- Easy compression action
- Comfortable plastic moulded grip
- Convenient bottom loading

23 series

Outer Crown	12.80
Inner Crown	11.80
Wire Dimensions	0.50 x 0.75
Leg Lengths	6 - 12

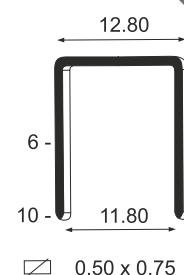

MODEL : M-10

HAND TACKER
Features :

- All metal body
- Easy loading
- Easy storage & portability as the tool has a handle lock
- Horizontal spring plate design ensures that strokes are accurate
- Can be operated with one hand

23 series

Outer Crown	12.80
Inner Crown	11.80
Wire Dimensions	0.50 x 0.75
Leg Lengths	6 - 10




MODEL : P-10

HAND TACKER
Features :

- All plastic body
- Multi-purpose, Do-It-Yourself tool
- Convenient loading

23 series

Outer Crown	12.80
Inner Crown	11.80
Wire Dimensions	0.50 x 0.75
Leg Lengths	6 - 10



ECO
MODEL : P-8

HAND TACKER
Features :


- Plastic body with metal magazine
- Convenient bottom loading
- Easy compression action

23 series

Outer Crown	12.80
Inner Crown	11.80
Wire Dimensions	0.50 x 0.75
Leg Lengths	6 - 8


ECO
10F series

Outer Crown	11.00
Inner Crown	10.00
Wire Dimensions	0.50 x 0.75
Leg Lengths	6 - 8



Hammer Tackers


MODEL : PRO-HM1310

HAMMER TACKER
Features :

- All steel body
- Convenient bottom loading
- Comfortable plastic handle

13 series

Outer Crown	10.40
Inner Crown	9.40
Wire Dimensions	0.50 X 0.75
Leg Lengths	6 - 10



PRO
MODEL : PRO-HM5014

HAMMER TACKER
Features :

- Heavy duty - for very hard wood
- Toughened driver blade
- Easy staple loading
- Moulded handle for superior grip

50 series

Outer Crown	10.70
Inner Crown	9.40
Wire Dimensions	0.65 x 1.30
Leg Lengths	6 - 14


PRO

Electric Staplers

KAYMO®

MODEL : PRO-ES8016




ELECTRIC STAPLER

Features :

- Power on / off switch
- Built in safety trigger
- Easy loading & unloading catch

80
series

Outer Crown	12.90
Inner Crown	11.40
Wire Dimensions	0.65 x 0.95
Leg Lengths	6 - 16



PRO

MODEL : XPRO-ES8016




ELECTRIC STAPLER

Features :

- Built in safety trigger
- High resistance body
- Removable front plate for easy un-jamming
- High quality fiber pusher

80
series

Outer Crown	12.90
Inner Crown	11.40
Wire Dimensions	0.65 x 0.95
Leg Lengths	6 - 16



XPRO

Electric Brad Nailers

MODEL : PRO-EB1835V2

new




ELECTRIC BRAD NAILER

Features :

- High impact tool
- Suitable for various wood varieties
- Portable tool. No air compressor needed
- Optional no mar rubber tip for scratch free nailing
- Nail depth adjustment to suit different lengths of brads

18G
series

Gauge	18
Head	2.00
Wire Dimensions	1.00 x 1.25
Leg Lengths	10 - 32



PRO

MODEL : XPRO-EB18G30




ELECTRIC BRAD NAILER

Features :

- Rear loading with heavy duty spring
- Built in safety trigger
- High resistance body

18G
series

Gauge	18
Head	2.00
Wire Dimensions	1.00 x 1.25
Leg Lengths	15 - 30



XPRO

MODEL : XPRO-PS8016RALM

new




PNEUMATIC STAPLER RAPID ACTION LONG MAGAZINE

Features :

- Fully closed magazine
- Long magazine to accommodate 240 staples
- Rear exhaust with sound absorber
- Rapid action adjustment knob
- Rapid action or single shot firing
- Easy nose unjamming plate

80
series

Outer Crown	12.90
Inner Crown	11.40
Wire Dimensions	0.65 x 0.95
Leg Lengths	6 - 16



MODEL : NEO-PS1013J

new




PNEUMATIC STAPLER

Features :

- Staple viewing window
- Large magazine latch for easy unloading
- Easy reach nose plate

10J
series

Outer Crown	11.20
Inner Crown	10.00
Wire Dimensions	0.60 x 1.20
Leg Lengths	6 - 13



MODEL : PRO-PS1013FV2

new




PNEUMATIC STAPLER

Features :

- Rear exhaust with silencer
- Ergonomic rubber grip
- 2 way optional loading / unloading catch
- Curved trigger for better stapling

10F
series

Outer Crown	11.00
Inner Crown	10.00
Wire Dimensions	0.50 x 0.75
Leg Lengths	3 - 13



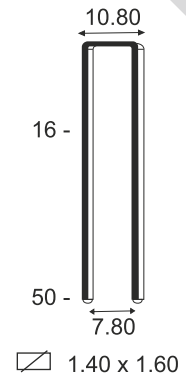
MODEL : NEO-PS10050
new

PNEUMATIC STAPLER
Features :

- 360° air exhaust
- Extra strong pusher spring
- Robust aluminum magazine
- Narrow safety device
- Ergonomic rubber grip

100 series

Outer Crown	10.80
Inner Crown	7.80
Wire Dimensions	1.40 x 1.60
Leg Lengths	16 - 50

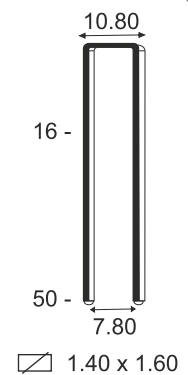

NEO
MODEL : ECO-PS10050E3
new

PNEUMATIC STAPLER
Features :

- Quick release unjamming latch
- Swivel air inlet adaptor for better tool operation
- Staple depth adjustment
- Switchable trigger for sequential or single shot options

100 series

Outer Crown	10.80
Inner Crown	7.80
Wire Dimensions	1.40 x 1.60
Leg Lengths	16 - 50



ECO
MODEL : XPRO-PS16WC38
new

PNEUMATIC STAPLER
Features :

- Ergonomic rubber grip
- Safety device
- Special staple clinching / folding attachment
- Set of packing plates to increase / decrease height of clincher

16WC series

Outer Crown	25.00
Inner Crown	22.00
Wire Dimensions	1.40 x 1.60
Leg Lengths	22 - 38



XPRO
MODEL : XPRO-PS16WC38FA
new

PNEUMATIC STAPLER FOLDING ATTACHMENT
Features :

- Ergonomic rubber grip
- Safety device
- Special staple clinching / folding attachment
- Set of packing plates to increase / decrease height of clincher

16WC series

Outer Crown	25.00
Inner Crown	22.00
Wire Dimensions	1.40 x 1.60
Leg Lengths	22 - 38


XPRO

Pneumatic Brad Nailer

KAYMO®

MODEL : NEO-PB18G50

new




PNEUMATIC BRADDER

Features :

- 360° air exhaust
- Screwable depth adjustment
- Easy unjamming catch
- Full metal magazine & loader

18G
series

Gauge	18
Head	2.00
Wire Dimensions	1.00 x 1.25
Leg Lengths	10 - 50



Pneumatic Coil Nailers 15°

MODEL : PRO-PN38100V2

new




PNEUMATIC COIL NAILER

Features :

- Ergonomic rubber grip
- Set of metal guards to prevent tool body damage
- Tough nylon magazine
- Silencer for noise reduction at exhaust
- Extra handle for proper tool gripping

Shank Dia	Head	Nail Lengths
2.8 / 2.9	7.0	70 - 90
3.0 / 3.4	7.0	100
3.8	7.3	125



MODEL : PRO-PN38100V2S

new




PNEUMATIC COIL NAILER WITH SAFETY

Features :

- Powerful tool for heavy duty application
- Robust design for proven durability
- Wear proof metal nail tray in magazine
- Side metal body protectors help prevent wear on the tool body
- Optional auxiliary side handle

Shank Dia	Head	Nail Lengths
2.8 / 2.9	7.0	70 - 90
3.0 / 3.4	7.0	100
3.8	7.3	125



Carton Stapler

KAYMO®

MODEL : XPRO-BB3518

new




BATTERY BOXER

Features :

- Ergonomic handle
- Latch
- Box detection
- Trigger finger detection
- Maintenance safety features
- LED status indicator
- Cross laser
- Li-ion battery technology

35 series

Outer Crown	35.00
Inner Crown	33.00
Wire Dimensions	0.90 x 2.30
Leg Lengths	15 - 18



For Plastic Fasteners

MODEL : XPRO-PB12P25

new




PNEUMATIC COMPOSITE BRAD NAILER

Features :

- Ergonomic rubber grip
- Optional trigger settings (bump fire / single fire)
- Transparent magazine slider
- Depth adjustment
- Spring mounted safety device
- Scratch-free rubber tip
- Easy unjamming catch
- 360° exhaust

18G series

Gauge	18
Head	2.00
Leg Lengths	18 - 25



MODEL : XPRO-PL77922LM

new




PNEUMATIC PLIER LONG MAGAZINE

Features :

- Hardened staple clinching plate
- Long magazine to accommodate 200 staples
- Rear exhaust with sound absorber
- Extra strong pusher spring for free movement of staples
- Top eye hook for optional spring balancer attachment

779
series

Outer Crown	12.50
Inner Crown	10.90
Wire Dimensions	0.60 x 1.25
Leg Lengths	12 - 22



XPRO

MODEL : XPRO-PL77916LM

new




PNEUMATIC PLIER LONG MAGAZINE

Features :

- Hardened staple clinching plate
- Long magazine to accommodate 200 staples
- Rear exhaust with sound absorber
- Extra strong pusher spring for free movement of staples
- Top eye hook for optional spring balancer attachment

779
series

Outer Crown	12.50
Inner Crown	10.90
Wire Dimensions	0.60 x 1.25
Leg Lengths	8 - 16



XPRO

MODEL : XPRO-PL77916BJ

new




PNEUMATIC PLIER BROAD JAW

Features :

- Ergonomic rubber grip
- Curved easy magazine opening catch
- Fully closed magazine
- Carton protector
- Extra strong pusher spring for free movement of staples
- Top eye hook for optional spring balancer attachment

779
series

Outer Crown	12.50
Inner Crown	10.90
Wire Dimensions	0.60 x 1.25
Leg Lengths	8 - 16



XPRO

MODEL : VIGON300



2.5 HP 50 LTRS

Technical details

Motor: 230V/1100 W
No. of revolutions: 2850 RPM
Inlet power: 300 l/min (66 gal./min.)
Effective output: 190 l/min (41.8 gal./min.)
Sound level (LpA): 85 dB(A)
Max. pressure: 8 bar (116 psi.)
Tank: 50 L (11gal.)
Weight: 35 kg (77.1 lb.)

Measurements:

L 750 x W 400 x H 700 mm
(L 29.53 x W 15.75 x H 27.56 in.)

Standard Equipment: Gauge for Tank Pressure, Reset Button, Pressure Reducer with Gauge, Additional Handle, Rubber Grip Handle, Pneumatic Tires, Mot-free

MODEL : VIGON 120



1.5 HP 12 LTRS

Technical details

Motor: 230V/1100 W
Horse power: 1.5 HP
No of revolutions: 2850 RPM
Inlet Power: 120 L/min (26.4 gal./min.)
Effective outlet: 85 L/min (18.7 gal./min.)
Sound level: 80 db(A)
Max. pressure: 8bar (114 psi)
Tank: 12 L (2.64 gal.)
Weight: 18kg (39.68 lb.)

Measurements:

L 510 x W 240 x H 480 mm
(L 20.08 x W 9.45 x H 18.9 in.)

Standard Equipment: Gauge for Tank Pressure, Reset Button, Pressure Reducer with Gauge, Rubber Grip Handle, Vulcanised Rubber Feet for Stable Position

MODEL : VIGON 240



2 HP 24 LTRS

Technical details

Motor: 230V/1500 W
Horse power: 2 HP
No of revolutions: 2850 RPM
Inlet Power: 240 L/min (52.81 gal./min.)
Effective outlet: 160 L/min (35.2 gal./min.)
Sound level: 79 db(A)
Max. pressure: 8bar (114 psi)
Tank: 24 L (5.28 gal.)
Weight: 26kg (57.34 lb.)

Measurements:

L 600 x W 340 x H 570 mm
(L 23.62 x W 13.39 x H 22.41 in.)

Standard equipment:

Gauge for Tank Pressure, Reset Button, Pressure Reducer with Gauge, Rubber Grip Handle, Strong Tires

MODEL : FRL 512
1/4" F/RL AIR CONTROL

Features :

- 5 Micron filter element
- Metal shatter guard for bowls
- Quick release shatter guard and bowls
- White background on gauge for easy viewing
- Full metal assembly
- Detachable wall mounting bracket

MODEL : FRL 884
1/2" F/RL AIR CONTROL

Features :

- 5 Micron filter element
- Metal shatter guard for bowls
- Unscrewable fixed ring for bowl removal
- White background on gauge for easy viewing
- Full metal assembly
- Oversized oil flow window
- Attached wall mounting bracket
- Moulded thermocol packing for product safety during transit

MODEL : FR 884
1/2" FILTER / REGULATOR

Features :

- 5 Micron filter element
- Metal shatter guard for bowls
- Unscrewable fixed ring for bowl removal
- White background on gauge for easy viewing
- Full metal assembly
- Detachable wall mounting bracket
- Moulded thermocol packing for product safety during transit

MODEL : B93C
1/4" PT AIR BLOW GUN WITH 12 CM STEEL NOZZLE

Features :

- Long reach SS nozzle
- Made from POM material
- Built in hanging loop for hanging on tool rack
- High air flow design

MODEL : JPL0802
1/4" X 8 MM PUSH TO CONNECT JPL ELBOW

Features :

- 1/4" male threading with thread lock
- Supreme gripping teeth

MODEL : JPL0804
1/2" X 8 MM PUSH TO CONNECT JPL ELBOW

Features :

- 1/2" male threading with thread lock
- Supreme gripping teeth for proper pipe holding strength

MODEL : JPD0802
1/4" X 8 MM PUSH TO CONNECT JPD BRANCH TEE

Features :

- 1/4" male threading with thread lock
- Supreme gripping teeth for proper pipe holding strength

MODEL : JPY08
PUSH TO CONNECT FITTING JPY UNION Y 8 MM

Features :

- Supreme gripping teeth for proper pipe holding strength

MODEL : JPU0808
**PUSH TO CONNECT JPU
UNION STRAIGHT 8 MM**

Features :

- Supreme gripping teeth for proper pipe holding strength

MODEL : JPC0802
**1/4" X 8 MM PUSH TO
CONNECT FITTING JPC
STRAIGHT**

Features :

- 1/4" male threading with thread lock
- Supreme gripping teeth for proper pipe holding strength

MODEL : JPC0804
**1/2" X 8 MM PUSH TO
CONNECT FITTING
JPC STRAIGHT**

Features :

- 1/2" male threading with thread lock
- Supreme gripping teeth for proper pipe holding strength

MODEL : J702G
**1/4" PT INDUSTRIAL
SWIVEL PLUG
(GERMAN TYPE)**

Features :

- **First time in India**
- 1/4" male threading
- Suited for Rectus type 26 & Kaymo type S3320SF coupler
- Pipe can be maneuvered in different angles by operator

MODEL : S3120PMA
**1/4" G MALE PLUG
UNIVERSAL STEEL
(GERMAN TYPE)**

Features :

- 1/4" male threading
- CNC machined
- Nickel chrome plated

MODEL : S3320SF
**1/4" FEMALE SOCKET
(GERMAN TYPE BRASS)**

Features :

- 1/4" female threading coupler
- CNC machined
- One touch application
- Superior locking onto the adaptor
- Same as Rectus type 26
- Extremely wear resistant and durable

MODEL : 20SFT
**1/4" FEMALE SOCKET
(ONE TOUCH NITTO TYPE)**

Features :

- 1/4" female threading coupler
- CNC machined
- Kaymo branded
- One touch application
- Superior locking onto the adaptor
- Same as Nitto type
- Extremely wear resistant and durable

MODEL : 20SFA
**1/4" FEMALE SOCKET
(TWO TOUCH NITTO TYPE)**

Features :

- 1/4" female threading coupler
- CNC machined
- Kaymo branded
- Two touch application
- Extremely wear resistant
- Same as Nitto type

MODEL : 20PMCC6
**1/4" PT MALE PLUG
(NITTO TYPE)**

Features :

- 1/4" male threading with thread lock
- CNC machined
- Nickel chrome plated

MODEL : HUR050805
**PU RECOIL HOSE
5 X 8 MM, 5 M**

Features :

- Kaymo branded
- Individually shrink wrapped coil hose
- Pressure burst tested upto 400 psi
- Max working air pressure 120 psi
- Uniform wall thickness of 3 mm

MODEL : HUR050810
**PU RECOIL HOSE
5 X 8 MM, 10 M**

Features :

- Kaymo branded
- Individually shrink wrapped coil hose
- Pressure burst tested upto 400 psi
- Max working air pressure 120 psi
- Uniform wall thickness of 3 mm

MODEL : HUS0508
PU AIR HOSE 5 X 8 MM

Features :

- Kaymo branded
- Plastic spool for easy unraveling of pipe
- Pressure burst tested upto 400 psi
- Max working air pressure 120 psi
- Uniform wall thickness of 3 mm

MODEL : R152L-A
**1/4" MINI AIR REGULATOR
WITH GAUGE BRACKET**

Features :

- Can regulate air pressure to suit the tools requirement
- Gauge is fitted on the regulator so that the operator can see pressure

MODEL : R504-BK
1/2" PT REGULATOR

Features :

- Can regulate air pressure to suit the tools requirement
- Gauge is fitted on the regulator so that the operator can see pressure

MODEL : JPC1202
**PUSH FITTING 12 MM-
1/4" MALE STRAIGHT**

Features :

- 1/4" Male threading with thread lock
- Supreme gripping teeth for proper pipe holding strength

MODEL : JPC1204
**PUSH FITTING 12 MM-
1/2" MALE STRAIGHT**

Features :

- 1/2" Male threading with thread lock
- Supreme gripping teeth for proper pipe holding strength

MODEL : 20SPA
**5 X 8 MM PU SOCKET
(STEEL)**

Features :

- To be used on 5mm X 8mm PU pipe
- Superior metal ball gripping design
- In built push on pipe connector
- Stainless steel with electro chrome finish
- Two touch locking system for a perfect lock

MODEL : 30SPA
**6.5 X 10 MM PU SOCKET
(STEEL)**

Features :

- To be used on 6mm X 10mm PU Pipe
- Superior metal ball gripping design
- In built push on pipe connector
- Stainless steel with electro chrome finish
- Two touch locking system for a perfect lock

MODEL : 40SPA
**8 X 12 MM PU SOCKET
(STEEL)**

Features :

- To be used on 8mm X 12mm PU Pipe
- Superior metal ball gripping design
- In built push on pipe connector
- Stainless steel with electro chrome finish
- Two touch locking system for a perfect lock

MODEL : HUS0812-RD
**PU AIR HOSE, 8 X 12 MM,
100 M, RED**

Features :

- Kaymo Branded Poly Urethane Pipe
- Plastic spool for easy unraveling of pipe
- Pressure burst tested upto 400 PSI
- Max working pressure 120 PSI
- Uniform wall thickness of 4 mm

MODEL : HUR081210-RD
**PU AIR RECOIL HOSE,
8 X 12 MM, 10 M**

Features :

- Kaymo Branded PU roll hose 10MTR
- Individually shrink wrapped coil hose
- Pressure burst tested upto 400 PSI
- Maximum working pressure 120 PSI
- Uniform wall thickness of 4 mm

MODEL : HUR081215-RD
**PU AIR RECOIL HOSE,
8 X 12 MM, 15 M, RED**

Features :

- Kaymo Branded Pu coil hose 15MTR
- Individually shrink wrapped coil hose
- Pressure burst tested upto 400 PSI
- Max working pressure 120 PSI
- Uniform wall thickness of 4 mm

MODEL : HUB0812100-BD
**PU BRAID AIR HOSE
8 X 12 MM, 100 M, BLUE**

Features :

- Kaymo Branded Blue PU Nylon Braided Pipe
- Plastic spool for easy unraveling of pipe
- Pressure burst tested upto 800 PSI
- Max working pressure 200 PSI
- Uniform wall thickness of 4 mm

MODEL : HUBR081210-BD
**PU AIR RECOIL HOSE
BRAID 8 X 12 MM, 10 M,
BLUE**

Features :

- Kaymo Branded blue PU nylon braided coil hose 10MTR
- Individually shrink wrapped coil hose
- Pressure burst tested upto 400 PSI
- Max working pressure 200 PSI
- Uniform wall thickness of 4 mm

MODEL : HUBR081215-BD
**PU AIR RECOIL HOSE
BRAID, 8 X 12 MM, 15 M,
BLUE**

Features :

- Kaymo Branded blue PU Nylon braided coil hose 15MTR
- Individually shrink wrapped coil hose
- Pressure burst tested upto 400 PSI
- Maximum working pressure 200 PSI
- Uniform wall thickness of 4 mm

MODEL : JPL1202
**PUSH FITTING 12 MM-
1/4" MALE ELBOW**

Features :

- 1/4" male threading with thread lock
- Supreme gripping teeth for proper pipe holding strength

MODEL : JPL1204
**PUSH FITTING 12 MM-
1/2" MALE ELBOW**

Features :

- 1/2" Male threading with thread lock
- Supreme gripping teeth for proper pipe holding strength

MODEL : JPD1202
**PUSH-TO-CONNECT
FITTING JPD BRANCH
TEE 1/4" X 12 MM**

Features :

- 1/4" male threading with thread lock
- Supreme gripping teeth for proper pipe holding strength

MODEL : JPD1204
**PUSH-TO-CONNECT
FITTING JPD BRANCH
TEE 1/2" X 12 MM**

Features :

- 1/2" male threading with thread lock
- Supreme gripping teeth for proper pipe holding strength

MODEL : JPU1212
**PUSH FITTING 12 MM,
UNION STRAIGHT**

Features :

- Supreme gripping teeth for proper pipe holding strength

MODEL : JPY12
**PUSH-TO-CONNECT
FITTING JPY UNION
Y 12 MM**

Features :

- Supreme gripping teeth for proper pipe holding strength

MODEL : S1A-20SP
**5 X 8 MM PU SOCKET
(COUPLER) 1 TOUCH**

Features :

- Special grade plastic for durability
- Light weight
- Non rust
- Additional stud fitting not required
- Coupler can be locked

SOFAS



Applications

To make the wooden frame
90, 92, 100 Series

To fix upholstery & elastic band
80, 10J Series

To fix 3mm / 4mm veneer to wooden frame
80, 10J, 18G Series

CHAIRS



Applications

To fix upholstery to chair / stool base
71, 80, 23 Series

To make double back chairs
18G Series

To remove fine wire staples from wood
SR (Staple Remover)

MODULAR / KITCHENS



Applications

To join MDF to MDF, ply & particle board
90, 100, 18G, 16G, HS, 2.1 (Coil Nail) Series

To fix fabric to MDF, particle board or ply tiles
72, 80, 10F, 10J Series

To fix aluminium sheets to MDF or ply
54, 92 (divergent point) Series



INTERIORS



Applications

To fix decorative mouldings on to wooden cupboards & windows
64 (Headless Pin) Series

WOODEN FLOORING



Applications

To fix wooden runner & skirting to concrete floor & wall
22 (Concrete Nail) Series

To fix rubber pad to wooden runner base
80 Series

To join top layer tongue & groove strips to the wooden runner
18G & 16G (Cleat Nail) Series

Wooden skirting
18G Series

FLUSH DOORS



Applications

To join wooden strips together
80 Series

CORRUGATED - TOP CLOSING



Applications

To close top of corrugated cartons
35 Series

CORRUGATED - BOTTOM CLOSING



Applications

To close bottom of empty corrugated cartons
35 Series

ANGLE & EDGE BOARDS



Applications

To make angle & edge board trays
590, 779 Series

To fix angle boards to wooden pallets
16WC, HS Series

CORRUGATED TO WOOD



Applications

To close wooden cases
Coil Nails, 100 Series

WOODEN CRATES



Applications

To close wooden cases
Coil Nails, 100 Series

WOODEN PALLETS



Applications

To make wooden pallets
Coil Nails

LABELING



Applications

To fix labels / plastic lining to wooden cases
13, 23, 50 Series

2 WHEELER SEATS



Applications

To fix rexine & foam to moulded plastic base
80 Series

BICYCLE SEATS



Applications

To fix rexine & foam to moulded plastic base
80, 10J Series

DOOR TRIMS



Applications

To fix rexine onto back of hardboard door trims
10F, 80 Series

CAR SEATS



Applications

To fix seat cover to metal springs
24 (C Rings) Series

Applications - Special

CARROM BOARDS



Applications

To make the board frame
90, 100, CF series
To fix the back reinforcement to the frame
90, 100, 18G Series
To fix the netted pockets
80 Series

PAINT BRUSHES



Applications

To fix the tin furrel onto the wooden handle
54, 18G Series

BUFFING WHEELS



Applications

To fix layers of leather / cloth to form wheel
16WC Series

PLYWOOD & VENEERS



Applications

To fix core veneer layers to make plywood
23, 24 Series

MUSICAL INSTRUMENTS

Applications

To fix finishing veneer /
fabric onto wood
**64 (Headless Pins),
54 Series**

MATTRESSES

Applications

To fix inner lining to metal
springs
779, 24 (C Rings) Series

TYRE RETREADING

Applications

To join rubber layers
together in cold process
23 Series

SHOES

Applications

To fix the sole to the heel
71, 80, 54, 97 Series

ARTIST CANVAS

Applications

To fix canvas to wooden
frame
80 Series

To make wooden frames
16G, 18G Series

SCREEN PRINTING

Applications

To fix screens onto the wooden
frame
80, 23 series

MOSQUITO NETS

Applications

To fix mosquito nets onto
wooden frames
23, 80 Series

POULTRY CAGES

Applications

To join metal wires together to
form a cage
24 (C Rings) Series

EXPANSION JOINTS



Applications

To staple glasswool & wire mesh together

779 Series

GIFT ARTICLES



Applications

To join MDF to MDF to make gift articles

64, 64SH, 18G Series

KITE SPINDLES



Applications

To join PVC reel to wooden rod to form a spindle

18G Series

For Plastic Composite Industry

WIND TURBINES



Applications

To join layers of fibre glass together in cold process

S05 Series

TIMBER PROCESSING



Applications

To fix core veneer layers to make plywood

S05 Series

BOAT BUILDING



Applications

To fix upholstery on to wood

S05 Series

To fix layered veneer to strip planking

S05, B18, P18 Series

To join wood to wood

B18 Series

OTHER APPLICATIONS

- Skipping ropes
- Mandap decoration, film sets, exhibition contractor
- Bird protection netting
- Submersible pump packing
- Interior & art applications for students
- Home applications for furniture repair & decoration

STAINLESS STEEL SCRAILS



**Stainless steel non corrosive
Ideal for outdoor applications**



**STAR HEAD
SCREW**

**SCREW
THREADS FOR
BETTER GRIP**



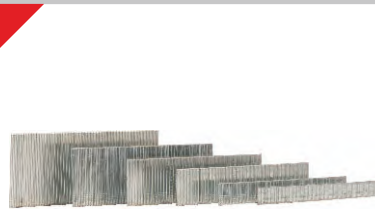
STAPLE PINS



Features :

- Different tensile strengths for wood working and corrugated industry
- Also available stainless steel staple pins with non corrosive fastening into wood or plastic

BRAD NAILS



Features :

- Minute head allows nail to go below surface
- Does not crack wood, unlike manual nailing

COIL NAILS



Features :

- Eliminates wastage
- Perfectly formed nail with round head and sharp tip
- Different length and head diameter available for different wood applications

HEADLESS PINS



Features :

- Leaves no mark or crack on wooden surface
- Recommended for polished and finished surfaces in handicrafts, furniture and interiors

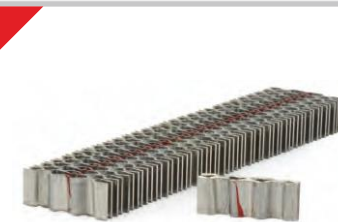
C RINGS



Features :

- Available in copper coated and steel galvanized finish, stainless steel
- Loose C Rings available for manual clinching

CORRUGATED FASTENERS



Features :

- Sharp end of corrugated fastener engineered to penetrate hardest variety of wood
- Strip form ensures zero wastage

CONCRETE NAILS



Features :

- 14 gauge concrete nails specially made from carbon steel wire
- Engineered to penetrate wood, concrete and brick

PLASTIC FASTENERS



Features :

- Melts at low temperatures, making it an ideal fastener for plywood, flush doors, wind turbines and boat building
- 100% rust free, non corrosive fasteners which do not damage sawing / sanding blades

CLEAT NAILS



Features :

- Transparent resin coating helps in bonding cleat nails to wooden planks
- Specially engineered for extremely hard wooden flooring and does not crack floors or runners during installation

DO'S



Use **KAYMO** FRL with every tool.
Tool requires dry lubricated and regulated air



Use safety goggles and protective gear while operating tool



Use recommended grade of oil to lubricate tool
(natural turbine oil ISO VG32)



Use **KAYMO** genuine spares for service and repairs



Use **KAYMO** quick release coupler with every tool



Use **KAYMO** blowgun to clean dust from the tools



Use **KAYMO** fasteners for best performance



Drain air compressor tank and FRL filter daily

DON'T'S



Do not use any chemical / petrol / kerosene or any inflammable liquid to clean the tools



Do not use force or hammer for unjamming of tool



Do not supply high pressure compressed air beyond recommendation given in manual and on tool



Do not keep the tool unattended or connected to airline when not in use



Do not connect the tool to any type of gases as it may explode and cause serious injury



Do not use incorrect fasteners with the tool



Do not operate the tool without adequate training and information



Do not point the tool at anybody and deactivate the safety device